



Nova Disc

Frame Data Sheet



Description :

A modern and classic design endurance bike frames. **Nova Disc** is hand crafted from Columbus CROMOR tubing. It featured with internal brake cable routing, flat-mount disc brake mounting and match with tapered crown-raceless carbon fork.

Tubes :

Columbus CROMOR double butted tubes from Taiwan. Stainless steel tubes (internal cable routing)

Front Triangle :

Columbus CROMOR double butted round section tubes
 ø31.8 top tube (0.8-0.5-0.8 mm THK)
 ø38.1 down tube (0.8-0.5-0.8 mm THK)
 ø31.8 seat tube (0.8-0.5-0.8 mm THK)

Rear Triangle :

Ø13 seat stay, 30(OD) x 12.5 (DT) chainstay

Head Tube :

Ø47 (4130), Fitting with 44mm headset* internal (top) external (bottom)

Bottom Bracket Shell :

4130, BSA 68mm

Fork* :

Thru-axle (Ø12) full carbon fork, Tapered steerer, Crown-raceless, and flat-mount disc brake mounting

Finishing :

Downhand welding, Sliver brazing, Anti-corrosion ED coating, Manual bake-painting,

Dropout & accessories :

CNC thru-axle rear dropout, Alloy thru-axle lever (Ø12*125 L and Ø12*162 L)

Max. Tires Clearance :

700 x 32c

Seatpost clamp* :

Ø 31.8mm alloy aluminum
 Compatible to Ø27.2 seatpost

Sizes & Weight:

S (50), M (52), L (54)
 1.85 - 2.05 kg

Colours :



* Accessories specification and availability subject to change without notice

Hand Crafted by :

Anemos Cycleworks
 Unit 7889, Block 4, Beijing road, Qingpu District,
 Shanghai 201700 P.R.Chin
 Mobile : +86 189 3082 2228 / +60 12 313 8618

#leolsteelbike
 #anemoscycleworks


www.anemoscycleworks.com


COLUMBUS
 Authorized Distributor



Nova Disc

Frame Geometry

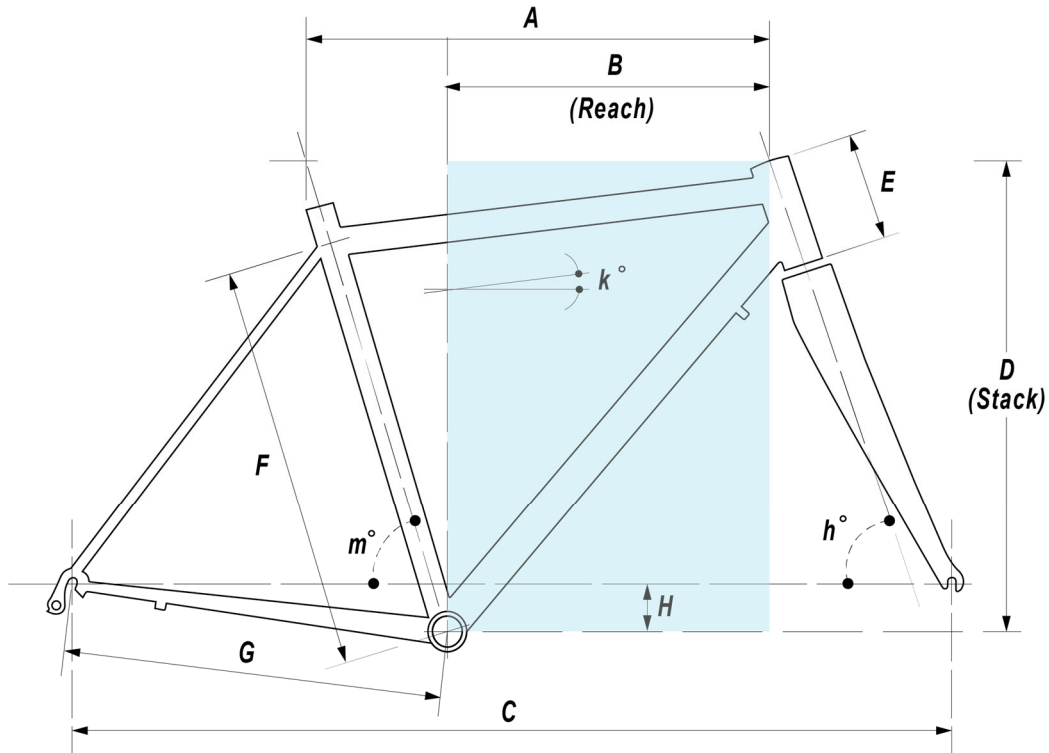

SIZE	A Horiz. TT	F ST Lgth.	B Reach	D Stack	C Wheelbase	E HT Lgth.	G CS Lgth.	H BB Drop	h° HT Angle	k° TT Angle	m° ST Angle
S (50 cm)	497	437	354	518	965	112	405	68	70°	8°	74.5°
M (52 cm)	518	473	369	539	978	130	405	68	71°	6°	74.5°
L (54 cm)	539	502	379	559	980	145	405	68	72.5°	5°	74.0°

All measurement in mm unless otherwise stated

TT=top tube, ST=seat tube, HT=head tube, SC=chain stay, BB=bottom bracket

Rider Height Recommendation :

Frame size	S (50 cm)	M (52 cm)	L (54 cm)	XL (56 cm)
Rider Height (cm)	150 - 160	160 - 170	170 - 180	180 - 185

For general guideline only. Please consult with professional bike fitter to determine the needed size

Hand Crafted by :

Anemos Cycleworks
Unit 7889, Block 4, Beijing road, Qingpu District,
Shanghai 201700 P.R.Chin
Mobile : +86 189 3082 2228 / +60 12 313 8618

#leolsteelbike
#anemoscycleworks
www.anemoscycleworks.com



COLUMBUS
Authorized Distributor